


ProfiPLUS

ВЫСОКОПРОИЗВОДИТЕЛЬНЫЕ УНИВЕРСАЛЬНЫЕ МАШИНЫ. СВЕРЛЕНИЕ КОЛЬЦЕВЫМИ ФРЕЗАМИ, НАРЕЗАНИЕ РЕЗЬБЫ, РАЗВЁРТЫВАНИЕ И ЗЕНКОВАНИЕ.

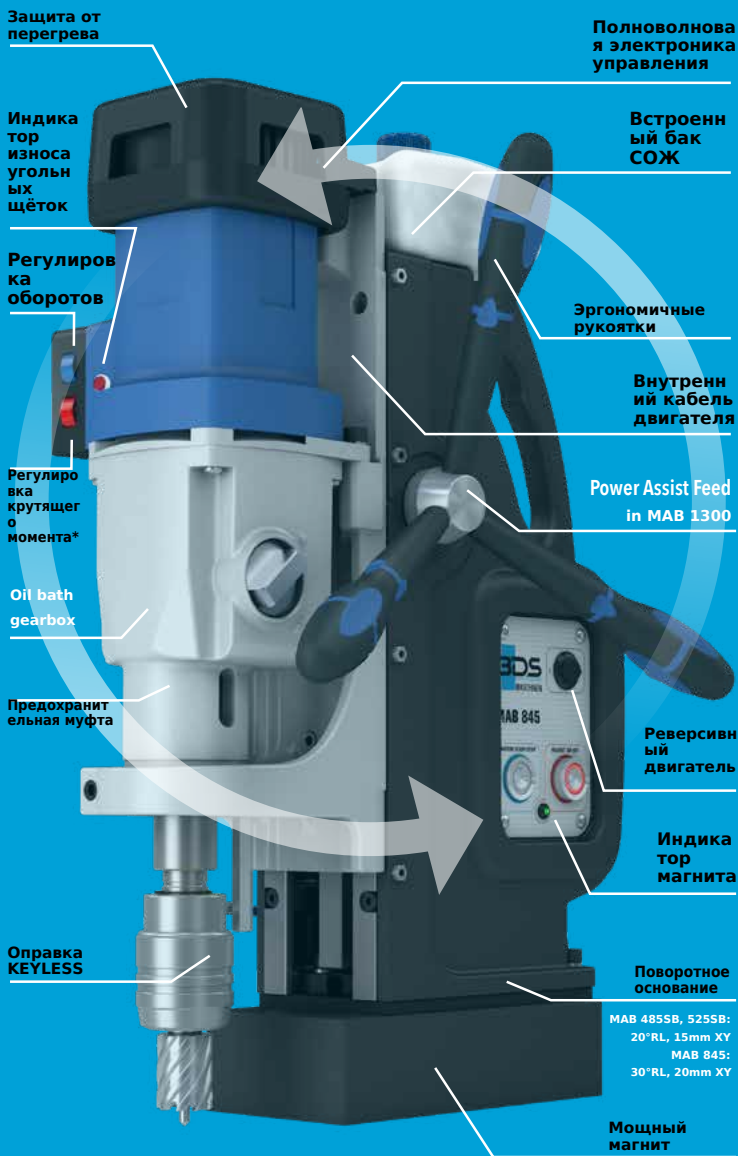

Серия ProfiPLUS рассчитана на пользователей, которым в сложных задачах нужна не только мощность, но и точное управление и повышенный комфорт в работе. ProfiPLUS впечатляет мощными двигателями, оптимизированными системами управления и безопасности, которые обеспечивают эффективную и безопасную работу даже в самых тяжёлых условиях. ProfiPLUS - магнитные машины для сверления и нарезания резьбы, изготовленные в Германии.

		Swivel Base	(✓ MAB 485 SB)
	Motor output	⚡ Voltage, V AC	1150 W (10.5 A) / 230; 110/125 V AC
	Stroke		160 mm (6-1/4")
	Weight		13 Kg. (29 lbs.)
	Spindle taper		MT 2
	KEYLESS arbor (19mm Weldon 3/4")		✓
	Speed gears		2
	Speed range (min ⁻¹)		50-250; 100-450
	Variable torque control		✓
	Variable speed control		✓
	Safety clutch		✓
	Clockwise/anticlockwise rotation		✓
	Full wave control electronics		✓
	Magnet indicator		✓
	Overheat protection		✓
	Carbon brush wear indicator		✓
Scope of delivery MAB 485 / MAB 485 SB			
Carry case	ZHK 400		
Ejector pin	ZAK 075, 100		
Arbor	ZSS 200		
Tapping adapter	ZGA 010, 012, 016		
Gear rim drill chuck	ZBK 113		
Taper drift/Adapter	ZKD 216		
Ejector drift	ZAS 002		
Safety lashing strap	4000161		
Allen key	8010301 (3 mm)		
Operating instructions		✓	

BDSMASCHINEN
MADE IN GERMANY

									
									
MAB 525		MAB 825		MAB 1300		MAB 2300			
									
MAB 525 SB		MAB 845							
50/60 mm (2-3/8")		100 mm (4")		130 mm (6")		200 mm (8")		130 mm (6")	
75 mm (3")		60 mm (2-3/8")		80 mm (3")		55 mm (2-3/8")		110 mm (4")	
M20 (3/4")		55 mm (2-3/8")		55 mm (2-3/8")		55 mm (2-3/8")		110 mm (4")	
20 mm (1")		110 mm (4")		M42 (1-5/8")		50 mm (2")			
20 mm (1")		M30 (1-1/8")		45 mm (1-3/4")		55 mm (2-3/8")			
50 mm (2-1/2")		31.75 mm (1-1/4")		50 mm (2-1/2")		60 mm (2-3/8")			
		31.75 mm (1-1/4")		80 mm (3")		90 mm (3-9/16")			
(✓ MAB 525 SB)		50 mm (2-1/2")							
		(✓ MAB 845)							
1600 W (14.50 A) / 230; 110/125 V AC		1800 W (16 A) / 230; 110/125 V AC		2300 W (20 A) / 230; 110/125 V AC		2800 Watts / 230; 110/125 VAC			
160 mm (6-1/4")		255 mm (10")		85/310 mm (3.35" / 12" without retainer)		310 mm (12")			
16 Kg. (35 lbs.)		25 Kg. (55 lbs.)		51 Kg. (112 lbs.)		52 kg (115 lbs.)			
MT 3		MT 3		MT 4		MT 4			
✓		✓							
2		4		4		3			
70-280; 180-580		40-110; 65-175; 140-360; 220-600		30-180; 50-120; 130-350; 210-550		25-50; 50-100; 100-200			
✓		✓		✓		✓			
✓		✓		✓		✓			
✓		✓		✓		✓		✓	
✓		✓		✓		✓		✓	
✓		✓		✓		✓		✓	
✓		✓		✓		✓		✓	
✓		✓		✓		✓		✓	
✓		✓		✓		✓		✓	
Scope of delivery MAB 525 / MAB 525 SB		Scope of delivery MAB 825 / 845		Scope of delivery MAB 1300 V		Scope of delivery MAB 2300			
ZHK 400		ZHK 825		ZHK 1300		ZHK 1500			
ZAK 075, 100		ZAK 075, 090, 100, 120		ZAK 075, 090, 100, 120		ZAK 075, 090, 100, 120			
ZSS 300		ZSS 300 + ZIA 332-KN				ZIA 419-KN, ZIA 432-KN			
ZGA 010, 012, 016									
ZBK 113									
ZKD 316				ZAP 200					
ZAS 003		ZAS 003		ZAS 004		ZAS 004			
4000161		4000161		4000161		4000161			
8010301 (3 mm)		911058 (6 mm) + for MAB 845: 8010381 (8 mm)		911058 (6 mm), 8010251 (4 mm), 8010381 (8 mm)		911058 (6 mm), 8010251 (4 mm), 8010381 (8 mm)			
✓		✓		✓		✓			

Optionally also available in 110 V AC, price on request.

BDSMASCHINEN
MADE IN GERMANY

СОВЕТ: дополнительную информацию о ПОВОРОТНОМ ОСНОВАНИИ см. на странице 52.
*Регулировка крутящего момента недоступна на MAB 485 / 485 SB / 2300.